




Features

- 1/3 inch IT CCD
- High Resolution : 420TV Lines
- Built-in Fixed (f=3.8mm)
- **Intelligent IR Technology**
- Built-in IR LED(12EA)
- Min Illumination : Night(0.00Lux, IR LED On)
- Auto White Balance
- Weather Proof Housing
- 50mm in Diameter
- IP66

DIMENSIONS

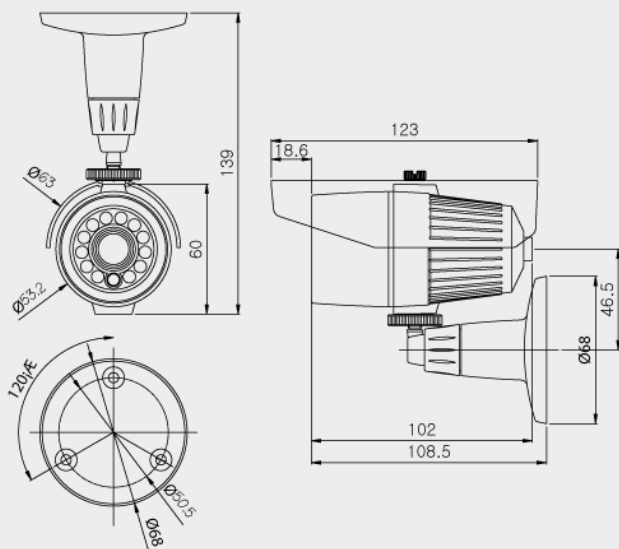

SPECIFICATIONS

Model	WBL-10S	WBL-11S
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch IT CCD	
Total Pixels	537(H) x 505(V) 270K	537(H) x 597(V) 320K
Effective Pixels	510(H) x 492(V) 250K	500(H) x 582(V) 290K
Horizontal Resolution	420 TV Lines	
Video Output	Composite: 1.0V p-p, 75Ω, Unbalanced	
S/N Ratio	More than 50dB(AGC Off)	
Lens	Built-in Fixed Lens (f=3.8mm)	
Min.Illumination	Day (0.01Lux), Night(0.00Lux, IR LED On)	
IR LED and Sensor	Intelligent IR Technology , IR LED 12EA (850nm, 30°)	
IR LED Visible Range	Max. 15m	
Digital Noise Reduction	Low, Middle, High, Off	
AGC	On/Off	
White Balance	Auto	
Shutter Speed	1/60~1/120,000 sec.	1/50~1/120,000 sec.
Supplied Voltage	DC 12V	
Dimensions	62.0 x 123.0mm	
Weight	Approx. 600g	