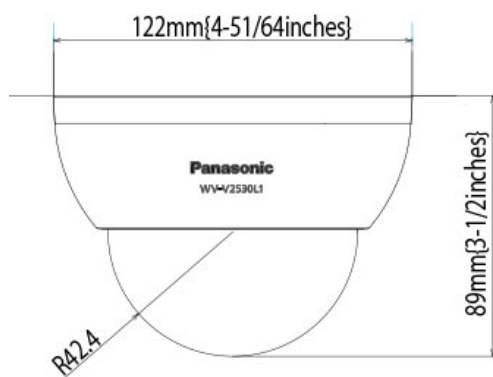


**Panasonic****WV-V2530L1****2 Megapixel 1080p Weatherproof Dome Camera Equipped with IR LED****Key Features**

- High-performance CMOS image sensor.
- Vari Focal : 2.7 mm - 12 mm
- H.265 / H.264 & MJPEG triple-stream encoding
- 25/30fps@1080P (1920 × 1080)
- Support Day / night(ICR) for day time and night time operation.
- Max. IR LEDs length 30 m.
- IP66 rated water and dust resistant.
- Micro SD card slot, up to 128GB.

**Appearance**

| Camera                                        |                                                                                                                             |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                                  | Approx. 1/2.8 type CMOS image sensor                                                                                        |
| Min Illumination                              | 0.2 lx / F1.4 (color)*, 0 lx / F1.4(IR on) <sup>*1</sup>                                                                    |
| Gain                                          | Auto/ Manual                                                                                                                |
| Back light compensation                       | OFF / BLC/ HLC/ WDR                                                                                                         |
| Shutter speed                                 | Auto/ Manual, 1/3 sec~1/100000 sec                                                                                          |
| Day / Night                                   | Auto(ICR) / Color / Black & White                                                                                           |
| IR LED Light                                  | Irradiation distance: 30 m {Approx. 98 ft}                                                                                  |
| White Balance                                 | Auto/ Natural/ Street Lamp/ Outdoor/Manual                                                                                  |
| Digital Noise Reduction                       | 3DNR ON/ OFF                                                                                                                |
| Privacy masking                               | Up to 4 areas                                                                                                               |
| Video Motion Detection                        | On/ Off (4 Zones, Rectangle)                                                                                                |
| Tampering Detection                           | On/Off                                                                                                                      |
| Lens                                          |                                                                                                                             |
| Zoom ratio                                    | 4.4x Optical (Motorized zoom/ Motorized focus)                                                                              |
| Focal Length                                  | 2.7 mm to 12 mm                                                                                                             |
| Angular Field of View                         | H: 37°(TELE) to 99° (WIDE)<br>V: 21°(TELE) to 52°(WIDE)                                                                     |
| Network                                       |                                                                                                                             |
| Network                                       | 10BASE-T/ 100BASE-TX, RJ45 connector                                                                                        |
| Resolution                                    | 1080P(1920x1080) / 1.3 M (1280x960) / 720P (1280x720)/ 640x480 / 640x360 / 320x240                                          |
| Image compression method                      | H.265/ H.264/ MJPEG                                                                                                         |
| Frame Rate                                    | 1 to 25/30 fps                                                                                                              |
| Protocol                                      | IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/ IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, DDNS, FTP, QoS, 802.1x |
| Maximum concurrent access number              | 20 users (Number of sessions that can connect to cameras at the same time)                                                  |
| Compatible micro SDXC/ SDHC memory card:*1 *2 | 4 to 128 GB                                                                                                                 |
| General                                       |                                                                                                                             |
| Power source                                  | 12 V DC, PoE (IEEE802.3af compliant)                                                                                        |
| Power Consumption                             | 12 V DC: 1 A / Approx. 12 W<br>PoE 48 V DC: 180 mA / Approx. 8.6 W (Class 0 device)                                         |
| Ambient Operating Temperature / Humidity      | -30 °C to +60 °C {-22 °F to 140 °F}<br>10 % to 90 % (no condensation)                                                       |
| Water and Dust Resistance                     | Main body: IP66                                                                                                             |
| Vandal Resistant                              | Compliant with IK10 (IEC62262)                                                                                              |
| Dimensions                                    | Φ122 mm × 89 mm (H)<br>{ø4-13/16 inches × 3-1/2 inches (H)}                                                                 |
| Weight (approx.)                              | Approx. 460 g {1.01 lbs}                                                                                                    |

\*1 When repeatedly recording images on a micro SD memory card using the auto overwrite function, make sure to use a micro SD memory card with high reliability and durability.

\*2 Use the micro SD memory card that complies with UHS-1 (Ultra High Speed-1) in the case of SD Speed Class 10.

**Important**

- Safety Precaution: Carefully read the operating instruction manual before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

- Weights and dimensions are approximate.
- Specifications are subject to change without notice.

**DISTRIBUTED BY:**