

1.0 Megapixel 720P IP Dome Camera (Indoor) SNC-2102

- 1/4" 1.0 Megapixel Progressive CMOS Sensor
- 1280x720P@30fps (720P) ; H.264 High Profile, MPEG4, M-JPEG
- Color:0.2Lux@F1.2, B/W:0.05Lux@F1.2, Sense-up:0.001Lux@F1.2
- Shutter Mode (Auto/Manual) & Sense Up
- Motion Detection & Alarm Trigger
- Two-way Audio & Support Multicast
- Support Micro SD/SDHC Card
- Support 12Vdc / PoE Power Input
- Support ONVIF 2.0 and PSIA




Specifications

Video	Image Sensor	1/4" 1.0 Megapixel Progressive CMOS Sensor
	Video Resolution/Frame Rate	1280x720P@30fps (720P) ; 720x480@30fps
	Video Frame Rate	Up to 30fps for All Video
	Video Compression	H.264 High Profile, MPEG4, M-JPEG
	Minimum Illumination	Color:0.2Lux@F1.2, B/W:0.05Lux@F1.2, Sense-up:0.001Lux@F1.2
	Digital Wide Dynamic Range	NA
	Second Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Signal to Noise Ratio	More than 50dB (AGC off)
	Mechanical IR Cut Filter	NA
	IR LED ; Working Distance	NA
Function	Menu	Can Be Set Via Browser
	Day&Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/100,000 to 1/7.5 sec.
	Manual Electronic Shutter	1/7.5, 1/15, 1/30, 1/60, 1/100, 1/250, 1/500, 1/1,000, 1/10,000, 1/100,000 sec.
	White Balance	Auto_wide / Auto_normal / Sunny / Shadow / Indoor / Lamp / FL1 / FL2
	DNR ; Sense Up	NA ; Yes
	Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch
	Image Setting	Brightness / Contrast / Saturation / Sharpness / Hue / EV Compensation / AWB / Rotation / Exposure Mode / Exposure Priority / Gain Control / Auto IRIS / BLC
	Motion Detection	Yes
	Timer Clock	Yes
	Camera Control Interface	Pelco D, Pelco P, Customer
	Browser	IE 8.0 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate Transmission	64 up to 12,000 Kbps
Network	Supported Protocols	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100 Base-TX)
	Video Streaming	H.264, MPEG4 and M-JPEG Dual/Triple Streaming
	Audio Streaming	Two-way Audio ; G.711 (μLaw), 8KHz/16KHz Sample Rate
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation, micro SD Recording
	Multicast	Support Multicast Function
General	Connector	Audio, RJ45/PoE, Power, BNC, Reset, RS485, Micro SD Slot
	Alarm In / Alarm Out	DI/DO
	Automatic IRIS ; Connector	DC
	Lens Mount	Built-in DC Auto IRIS Lens
	Lens, Angle of View (H)	f3.0~10mm/F1.2 Aspherical Megapixel Varifocal Lens/94.6°~28.8°
	Water Resistance	NA
	Max. Breaking Strength	NA
	Power Supply ; Consumption	12Vdc / PoE ; 4W
	Operation ; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	140(DIA)x112(H)mm
	Net Weight	500g
	Accessories Option	Wall Bracket:MTB-201 ; Ceiling Bracket:MTB-504



Dimensions

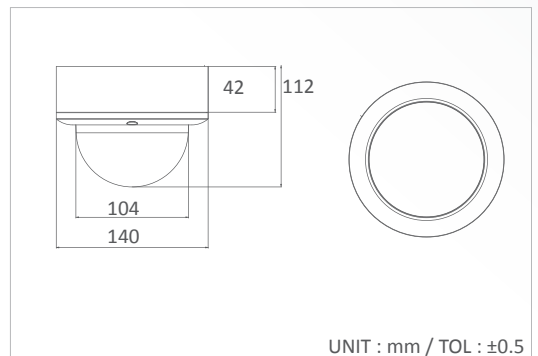

Option

