

SHANY

2.0 Megapixel (1080P)IP Dome Camera SNC-L226MX


- 1/2.7" 2.0 Megapixel Progressive CMOS Sensor
- 1920x1080@30fps (1080P) ; H.264, MPEG4, M-JPEG
- 0Lux (IR ON at 2 Lux)
- Electronic Shutter (Auto/Manual)
- Sense-up
- Image Setting
- Multicast Support
- Support 12Vdc / PoE Power Input
- Support ONVIF S




Specifications

Video	Image Sensor	1 / 2.7" 2.0 Megapixel Progressive CMOS Sensor
	Video Resolution/Frame Rate	1920x1080@30fps, 1280x720@30fps
		720x480@30fps
	Video Frame Rate	Up to 30fps for All Video
	Video Compression	H.264, MPEG4, M-JPEG
	Minimum Illumination	0Lux (IR ON at 2 Lux)
	WDR/HDR	---/---
	Second Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Signal to Noise Ratio	More than 58dB
	Mechanical IR Cut Filter	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux)
Function	IR LED ; Working Distance	36 units; 15~20m
	Menu	Can Be Set Via Browser
	Day&Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/100,000 to 1/7.5 sec.
	Manual Electronic Shutter	1/7.5, 1/15, 1/25, 1/30, 1/50, 1/60, 1/100, 1/250, 1/500, 1/1,000, 1/10,000, 1/100,000 sec.
	White Balance	Auto_wide / Auto_normal / Sunny / Shadow / Indoor / Lamp / FL1 / FL2
	DNR ; Sense Up	---; Yes
	Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch
	Image Setting	Brightness / Contrast / Saturation / Sharpness / HUE / EV Compensation / AWB / Rotation / Exposure Mode / Exposure Priority / Auto IRIS / BLC / AGC
	Integrated Video Detection	Motion Detection
	Timer Clock	Yes
	Camera Control Interface	Pelco D, Pelco P, Customer
Network	Browser	IE 8.0 or Above
	Ethernet	10/100M/1000M Auto Negotiation
	Bit Rate Transmission	64 up to 12,000 Kbps
	Supported Protocols	TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100/1000M Base-TX)
	Video Streaming	H.264, MPEG4 and M-JPEG Dual/Triple Streaming
	Audio Streaming	---
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email
		Notification via Email, HTTP
	Multicast	Support Multicast Function
General	Connector	RJ45, DC Power, BNC, Reset
	DI/DO	---
	Automatic IRIS ; Connector	---
	Lens Mount	Built-in Varifocal Lens
	Lens, Angle of View (H)	f2.8~12mm
	Water Resistance	IP66
	Max. Breaking Strength	---
	Power Supply ; Consumption	12Vdc/PoL(Option : PoE) ; 9W
	Operation ; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	119(DIA)x88(D)mm
	Net Weight	700g
	Accessories Option	---

*Specifications are unfixed and do not apply to customized projects. 11F2 140422

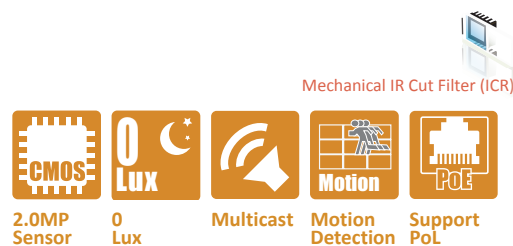

Dimensions

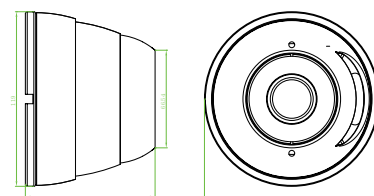

UNIT : mm / TOL : ±0.5

IP
Camera

