

## Standalone NVR SNVR-8004ST-P1

- 4ch 1080P / 4ch 720P Standalone NVR
- Linux Embedded – Free from PC Crash and Virus Attack
- High throughput for Megapixel Camera Recording
- Local Display with HDMI / BNC / VGA Output
- Digital PTZ and Multi-view
- Web-based Configuration, Live Viewing, Playback
- Auto Search Camera
- Support Peer to Peer Mobile Viewing
- Support external WiFi / 3G Dongle
- Support Video Forwarding



### Specifications

System	CPU	SoC
	System	Standalone NVR
	Operation System	Embedded Linux
	Language	Traditional Chinese, Simplified Chinese, English, Japanese, Thai, Korean, Russian, French, German, Italian, Portuguese, Spanish, Dutch, Turkish, Hungarian, Persian, Polish, Hebrew, Kazakh, Czech, Romanian
Video	System Update	Update Firmware via USB /Ethernet
	Recording Cameras	4ch 1080P / 4ch 720P
	Video Compression	H.264
	Recording Performance	1080P:4Mbps~6Mbps, 720P:2Mbps~4Mbps Sub-stream:1Mbps, Max 20Mbps,
Audio	Audio&Video Recording	Audio and Video Recording in Synchronization (Depends on IP Camera)
Alarm	Alarm In	4ch
	Alarm Out	1ch
Function	Menu	Can be set via browser or local control ; Local Control: Mouse
	Split Screen	1, 4
	Recording Stream	H.264
	Recording Resulation / Speed	1080P:25/30fps, 720P:25/30fps
	Recording Mode	Scheduled Record, Manual Record, Dynamic Detection, Alarm Trigger
	Video Search	Time Line Search, Event Search
	Remote Live View Control	Live View, Preset / Go, Remote I/O, Snapshot, Multi-view, 15X Digital PTZ
	Video Playback	1080P: 1ch, 720P: 4ch simultaneously
	Video Backup	USB Backup (Flash Drives, USB Hard Disk)
Network	Browser	IE 8~10
	Ethernet	10/100M Auto Negotiation x1
	Supported Protocols	TCP/IP, PPPoE, DHCP, DNS, RTSP, HTTP, SMTP
	Video Streaming	4ch 1080P / 4ch 720P
	Audio Streaming	Standard Compression G.711
	User	Support 4 Simutaneous Users
	Security	ID/Password Protection, User Access Log
	Alarm Event	Event Type: Video Loss, Sensor Triggered, Motion Detection Triggered
	Mobile Surveillance	Android, iOS(iPhone/iPad), Windows Mobile, Blackberry, Symbian
Interface	Control	RS485 x1
	Ethernet Interface	RJ45 x5 (PoL x4, LANx1)
	USB Interface	USB 2.0 x3
	Video Out	VGA x1, HDMI x1, BNC x1
	Audio	Audio In (RCA) x1 ; Audio Out (RCA) x1
	Hard Disk Drive	SATA x1, Max. 4TB
General	Power Supply	15Vdc 4A
	Operation Temperature	-10°C~55°C
	Storage Temperature	-10°C~60°C
	Operation Humidity	10%~90%
	Dimensions	260(W)x43(H)x220(D)mm
	Net Weight	1.5kg
	Supported IP Cam Brand(s)	SHANY, ONVIF Profile S


\*Specifications are unfixed and do not apply to customized projects. 140422




## Appearance



Wi-Fi 3G AUDIO VGA 720P/1080P LED(POWER/LINK) USB Port

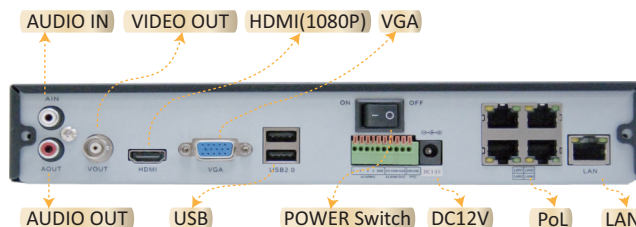

## Total Solution

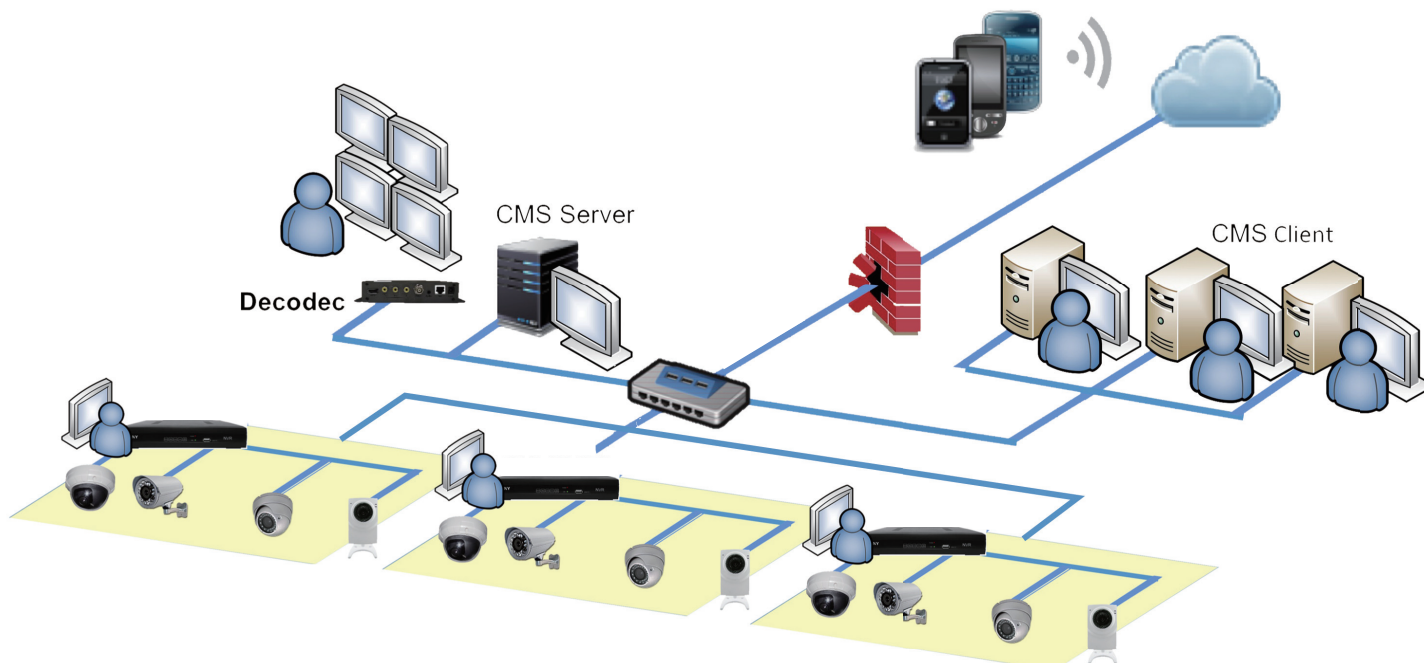

IP  
NVR



## Field Application

Retail Store



Small Office



Warehouse



Residential



Authorized Distributor

**SHANY**  
THE ELITE OF CCTV

[www.shany.com](http://www.shany.com)